

TT274 Thermocouple Temperature Transmitter

Overview

Model TT274 is a 2-wire temperature transmitter for types J and K thermocouples. The transmitter converts the thermocouple's millivolt signal to a 4 to 20 mA DC current signal. Because this current signal is immune to leadwire and electrical noise, the TT274 lets you obtain accurate temperature readings from thermocouples thousands of feet away. An ordinary twisted pair of wires carries both the temperature signal and power for the transmitter's electronics.

With the isolation option, the mV input signal from the thermocouple is electrically isolated from the 4 to 20 mA output, allowing use of grounded thermocouples with multiple TT274s operating from the same power supply.

An LED conveniently indicates the status of the control loop. The brightness is directly proportional to the loop current. A dark LED signals an open sensor or loss of current loop power.

The output signal of the TT274 is voltage linear (not temperature linear) and is intended for use with instruments which compensate for the nonlinear signal output of the thermocouple sensor.

- 4 to 20 mA current signal
- Fits standard 35 mm DIN rail
- Field-calibrate to your thermocouple type and temperature range
- Optional Input/Output isolation to 600 VRMS

Specifications

Input: Type J or K thermocouple.

Output: 4 to 20 mA DC over specified range.

Accuracy: $\pm 0.2\%$ of span.

Linearity: Voltage linear.

Adjustments:

Zero: -50°C to 150°C (-58°F to 302°F).

Span: Type J: 125 to 850°C (225 to 1530°F).

Type K: 150 to 1200°C (270 to 2160°F).



TT274 Thermocouple Temperature Transmitter

Ambient temperature:

Operating: -40 to 85°C (-40 to 185°F).

Storage: -55 to 100°C (-67 to 212°F).

Ambient temperature effects: $\pm 0.036\%$ of span/ $^{\circ}\text{C}$ ($\pm 0.02\%$ of span/ $^{\circ}\text{F}$).

Cold junction compensation drift: $\pm 0.03^{\circ}\text{C}/^{\circ}\text{C}$ for -25 to 70°C ambients. $\pm 0.06^{\circ}\text{C}/^{\circ}\text{C}$ for -40 to -25°C and 70 to 85°C ambients.

Warmup drift: $\pm 0.1\%$ of span max., assuming

$V_{\text{supply}} = 24$ VDC and $R_{\text{loop}} = 250 \Omega$.

Stable within 15 minutes.

Input/output isolation (optional): 600 VRMS, 1 minute.

Supply voltage:

Non-Isolated: 10 to 45 volts DC with no load.

Isolated: 13 to 45 volts DC with no load.

Reverse polarity protected.

Voltage effect: $\pm 0.001\%$ of span per volt.

Maximum load resistance: The maximum allowable resistance of the signal-carrying loop is given by this formula:

$$\text{Non-Isolated: } R_{\text{loop max}} = \frac{V_{\text{supply}} - 10}{0.020 \text{ amps}}$$

$$\text{Isolated: } R_{\text{loop max}} = \frac{V_{\text{supply}} - 13}{0.020 \text{ amps}}$$

Maximum output current: 28 mA.

Connections: Terminal block accepts wires from AWG 22 to AWG 14.

Physical: Polycarbonate, DIN rail enclosure.


Weight: 4.2 oz. (119 g).

TT274 Thermocouple Temperature Transmitter


Specification options

TT274	Model number
K	T/C element code J = Type J thermocouple K = Type K thermocouple
1	Output: 4 to 20 mA DC
N	Input/Output: N = Non-isolated I = Isolated
(-25/200)	Factory preset temp. range: (4 mA/20 mA temperature) Range is user adjustable. Refer to the Zero and Span specifications.
C	Temperature scale: F = Fahrenheit C = Celsius
TT274K1N(-25/200)C = Sample part number	

Dimensions in inches (mm)

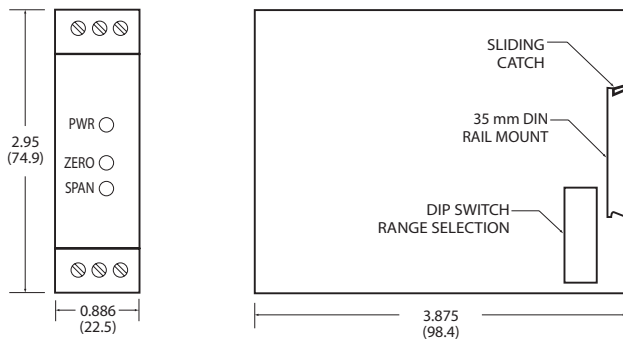

Wiring diagram

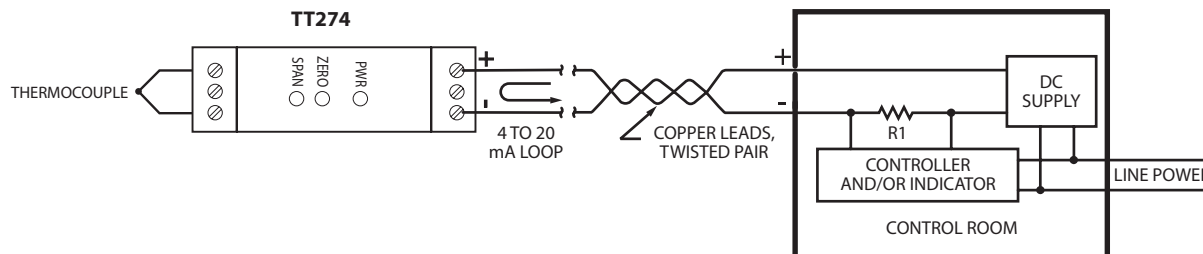

Specifications subject to change.

Worldwide Headquarters
7300 Commerce Lane
Minneapolis, MN 55432 USA
Tel: 1.763.571.3121
Fax: 1.763.571.0927
sales@minco.com
www.minco.com

European Headquarters
Usine et Service
Commercial, Z.I.
09310 Aston, France
Tel: (33) 5 61 03 24 01
Fax: (33) 5 61 03 24 09

Asia Pacific Headquarters
20 Science Park Road
#02-31 Teletech Park
Singapore Science Park II
Singapore 117674
Tel: (65) 6511 3388
Fax: (65) 6511 3399

ISO 9001:2000 / AS9100B
ITT11051906R1
© Minco 2006

MINCO
A critical component of your success™

Flex Circuits
Thermofoil™ Heaters
Sensors
Instruments