

TT274 T/C Temperature Transmitter

- ◆ Accurate, stable 4 to 20 mA signal
- ◆ Fits standard 35 mm DIN rail
- ◆ Field-calibrate to your temperature range
- ◆ Optional Input/Output isolation to 600 VRMS




The Model TT274 is a 2-wire temperature transmitter for types J and K thermocouples. The transmitter converts the thermocouple's millivolt signal to a 4 to 20 mA DC current signal. Because this current signal is immune to leadwire and electrical noise, the TT274 lets you obtain accurate temperature readings from thermocouples thousands of feet away. An ordinary twisted pair of wires carries both the temperature signal and power for the transmitter's electronics.

With the isolation option, the mV input signal from the thermocouple is electrically isolated from the 4 to 20 mA output, allowing use of grounded thermocouples with multiple TT274's operating from the same power supply.

An LED conveniently indicates the status of the control loop. The brightness is directly proportional to the loop current. A dark LED signals an open sensor or loss of current loop power.

The output signal of the TT274 is voltage linear (not temperature linear) and is intended for use with instruments which compensate for the nonlinear signal output of the thermocouple sensor.

Wiring diagram

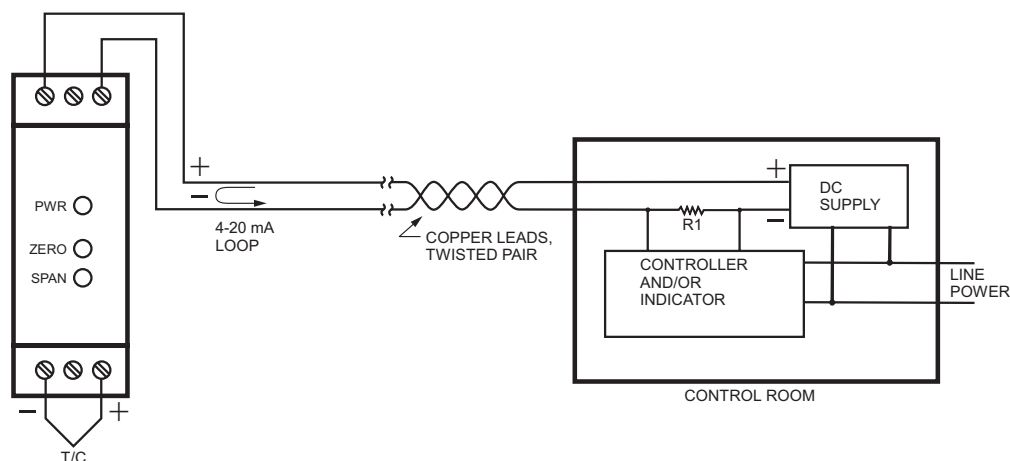

Specifications

Input: Type J or K thermocouple.

Output: 4 to 20 mA DC over specified range.

Accuracy: ±0.2% of span.

Linearity: Voltage linear.

Adjustments:

Zero: -50°C to 150°C (-58°F to 302°F)

Span:

Type J: 125°C to 850°C (257°F to 1562°F)

Type K: 150°C to 1200°C (302°F to 2192°F)

Ambient temperature:

Operating: -40 to 85°C (-40 to 185°F).

Storage: -55 to 100°C (-67 to 212°F).

Ambient temperature effects:

±0.036% of span/°C (±0.02% of span/°F).

Cold junction compensation drift:

±0.03°C/°C for -25 to 70°C ambients.

±0.06°C/°C for -40 to -25°C and 70 to 85°C ambients.

Warmup drift: ±0.1% of span max.,

assuming $V_{supply} = 24$ VDC and $R_{loop} = 250 \Omega$.

Stable within 15 minutes.

Input/output isolation (optional): 600 VRMS, 1 minute.

Supply voltage:

Non-Isolated: 10 to 45 volts DC with no load.

Isolated: 13 to 45 volts DC with no load.

Reverse polarity protected.

Voltage effect: ±0.001% of span per volt.

Maximum load resistance: The maximum allowable resistance of the signal-carrying loop is given by this formula:

$$\text{Non-Isolated: } R_{loop\ max} = \frac{V_{supply} - 10}{0.020\ \text{amps}}$$



$$\text{Isolated: } R_{loop\ max} = \frac{V_{supply} - 13}{0.020\ \text{amps}}$$

Maximum output current: 28 mA.

Connections: Terminal block accepts wires from AWG 22 to AWG 14.

Weight: 4.2 oz. (119 grams).

Dimensions: All dimensions are in inches (millimeters)

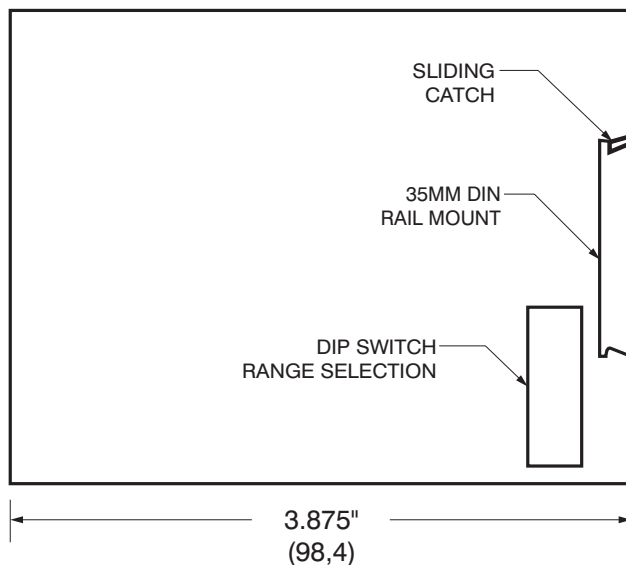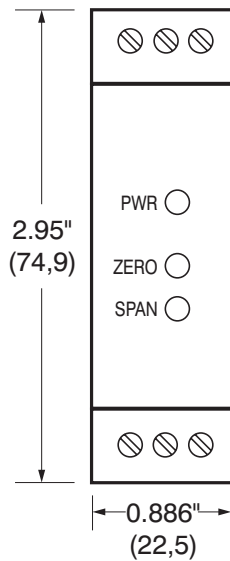

How to order:

TT274	Model number: TT274
K	T/C element code: J = Type J thermocouple K = Type K thermocouple
1	Output: 4-20 mA DC
N	Input/Output: N = Non-Isolated I = Isolated
(-25/+200)	Factory preset temperature range: (4 mA temperature / 20 mA temperature) Range is user adjustable. Refer to the Zero and Span specifications at left.
C	Temperature scale: F = Fahrenheit C = Celsius
TT274K1N(-25/+200)C ← Sample part number	

MINCO
ISO 9001: 2000

Minco Products, Inc
7300 Commerce Lane
Minneapolis, MN 55432 U.S.A.
Tel: 763-571-3121
Fax: 763-571-0927
www.minco.com

Customer Service/Order Desk:
Tel: 763-571-3123
Fax: 763-571-0942
custserv@minco.com



Minco S.A.
Usine et Service
Commercial, Z.I.
09310 Aston, France
Tel: (33) 5 61 03 24 01
Fax: (33) 5 61 03 24 09

Minco EC
Hirzenstrasse 2
CH-9244 Niederuzwil
Switzerland
Tel: (41) 71 952 79 89
Fax: (41) 71 952 79 90