


# Humidity Sensor/Transmitter Assembly

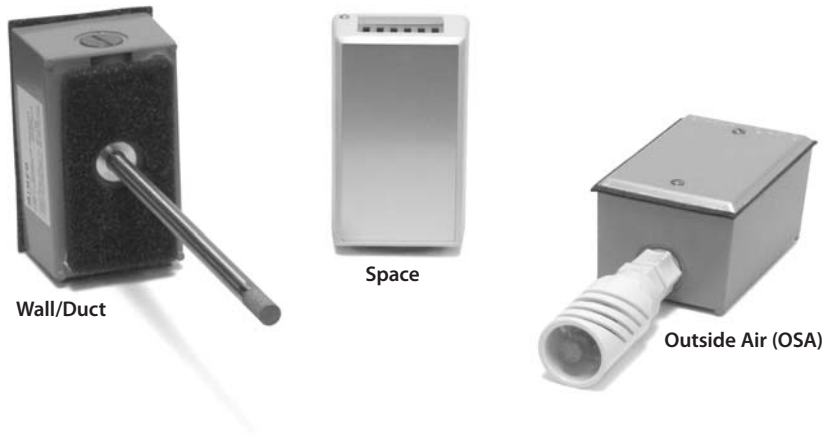

## Overview

Minco humidity and humidity/temperature transmitters are designed using an advanced microprocessor. Digital signal processing allows these transmitters to precisely match the characteristics of the humidity sensor to a wide range of RH and temperature values found in the many applications the product serves.

The humidity sensor is composed of an integrated circuit (IC) with a stable polymer element and platinum RTD that is used for temperature compensation. This sensor offers outstanding resistance to airborne contaminant and chemicals, and is protected by a sintered stainless steel filter which resists condensation.

- Wall/Duct/OSA mounting configurations
- Accuracies of  $\pm 1\%$  or  $\pm 2\%$  RH
- Temperature compensated
- Temperature output option
- Two-point field calibration
- NIST traceable calibrations

## Applications

Building environmental control systems (HVAC), hospitals, food storage, warehouses, clean rooms, pharmaceutical, freezers, drying equipment, and emissions monitoring.

Specify and order products at:  
[www.minco.com/sensors\\_config](http://www.minco.com/sensors_config)

## Specifications

### Ambient Temperature:

Operating:

Room:  $-10$  to  $150^{\circ}\text{F}$  ( $-23$  to  $65^{\circ}\text{C}$ ), non-condensing.

Wall/Duct/OSA:  $-10$  to  $185^{\circ}\text{F}$  ( $-23$  to  $85^{\circ}\text{C}$ ), non-condensing.

Storage:

Room:  $-58$  to  $150^{\circ}\text{F}$  ( $-50$  to  $65^{\circ}\text{C}$ ), non-condensing.

Wall/Duct/OSA:  $-58$  to  $185^{\circ}\text{F}$  ( $-50$  to  $85^{\circ}\text{C}$ ), non-condensing.

**Supply voltage:** 9.5 to 35 VDC, non-polarized.

**Voltage effect:**  $\pm 0.001\%$  of span/volt from 9.5 to 35 VDC.

**Loop resistance:** The maximum allowable resistance of the signal-carrying loop, including extension wires and load resistors, is given by this formula:  $R_{\text{loopmax}} = (V_{\text{supply}} - 9.5)/0.02$  AMPS. For example, if supply voltage is 24 VDC, the loop resistance must be less than  $725 \Omega$ .

**Adjustments:** Zero and span field adjustments, non-interacting.

**Time Constant:** 50 seconds in slow moving air.

**Connections:** Screw terminals (22-14 AWG wire).

**Weight:**

Room: 0.19 lb (.084 kg).

Wall/Duct/OSA: 1.20 lb (0.55 kg).

**Minimum output current:** 3.5 mA

**Maximum output current:** 23 mA.

*Specifications subject to change*

## Humidity Transmitter AH429 and AH439

**Output:** 4-20 mA DC = 0% to 100% RH.

**Sensing Element:** Capacitive monolithic IC.

**Accuracy:** Includes temperature, linearity, hysteresis, and repeatability.

- ±1% from 10% to 80% RH @ 25 to 35°C or
- ±2% from 0% to 90% RH @ 25°C
- (±3% from 0% to 90% RH @ 15 to 50°C)
- (±5% from 0% to 90% RH @ 0 to 82°C)

## Temperature Transmitter (AH439 only)

**Output:** 4-20 mA DC over the specified temperature range.

**Sensing element:** 1000 Ω platinum; 2 lead resistance thermometer, 0.00385 TCR.

**Accuracy:** Includes resistance thermometer tolerance, calibration accuracy, linearity, and ambient temperature effects.

- ±.75% of Temptran™ span for 32 to 122°F ambient.
- ±1.50% of Temptran™ span for -13 to 185°F ambient.

## AH429 Specification and order options

AH429	Model number:
R	Enclosure D: Duct mount, 8" probe length O: Outside Air/Wall mount, 4" probe length with shield, weather resistant enclosure S: Space mount W: Wall mount, 4" probe length, weather resistant enclosure R: Remote probe, 4" probe length
1	Output: 4 to 20 mA DC
N10	Calibration accuracy (humidity transmitter) N10: ±1% from 10% to 80% (25 to 35°C) with NIST certificate N20: ±2% from 0% to 90% (25 to 35°C) with NIST certificate S20: ±2% from 0% to 90% (25 to 35°C)
T1	Sensing element cover (omitted on "S" space mount models) T0= Sintered stainless steel; pressed on cover T1= Sintered stainless steel; screw on cover T2= Slotted stainless steel; screw on cover (NA on "O" outside air models)
To order enclosure D, O, S or W, stop here. To order enclosure R (remote probe), add:	
A	Probe mounting location A = Side mounting B = Bottom mounting
48	Remote probe cable length (in inches) 48" and 96" are standard lengths
AH429R1N10T1A48 = Sample part number	

## AH429 = Humidity Transmitter

## AH439 = Humidity/Temperature Transmitter

## AH439 Specification and order options

AH439	Model number:
R	Enclosure D: Duct mount, 8" probe length O: Outside Air/Wall mount, 4" probe length with shield, weather resistant enclosure S: Space mount W: Wall mount, 4" probe length, weather resistant enclosure R: Remote probe, 4" probe length
1	Outputs: 4 to 20 mA DC
N10	Calibration accuracy (humidity transmitter) N10: ±1% from 10% to 80% (25 to 35°C) with NIST certificate N20: ±2% from 0% to 90% (25 to 35°C) with NIST certificate S20: ±2% from 0% to 90% (25 to 35°C)
S	Temperature transmitter range EN: -20°F to 140°F S: 0°F to 100°F A: 20°F to 120°F Bl: 30°F to 130°F KK: 30°F to 180°F N: 32°F to 122°F H: 40°F to 90°F More temperature range codes starting on page 5-20 or <a href="http://www.minco.com/rangecode/">www.minco.com/rangecode/</a>
T1	Sensing element cover (omitted on "S" space mount models) T0= Sintered stainless steel; pressed on cover T1= Sintered stainless steel; screw on cover T2= Slotted stainless steel; screw on cover (NA on "O" outside air models)
To order enclosure D, O, S or W, stop here. To order enclosure R (remote probe), add:	
A	Probe mounting location A = Side mounting B = Bottom mounting
48	Remote probe cable length (in inches) 48" and 96" are standard lengths
AH439R1N10ST1A48 = Sample part number	

Specifications subject to change

# Hazardous Area Humidity Assembly



## Overview

Models AH71\_, AH72\_, and AH73\_ series are 2-wire temperature compensated humidity transmitters that are FM and CFM approved for use in hazardous locations. Intrinsically safe models are available with an optional temperature transmitter output. The AH73 is also available with an optional digital display for remote indication of relative humidity and temperature.

The transmitters utilize a thin film capacitive humidity sensor which provides outstanding sensitivity and chemical robustness. The transmitter converts the humidity sensor's signal into a 4 to 20 mA DC current, which changes proportionally from 4 mA at 0% RH to 20 mA at 100% RH. The optional temperature loop produces a second 4 to 20 mA DC output where the current changes from 4 mA at the lowest temperature of the range, to 20 mA at the top of the temperature range. The leads that supply power also carry the current signal.

- Accuracy of  $\pm 2.5\%$  RH
- Temperature compensated
- Temperature output option
- Two-point field calibration
- NIST traceable calibrations

## Applications

Building automation systems (HVAC), hospitals, food storage, warehouses, clean rooms, pharmaceutical, drying equipment, and emissions monitoring.

## Specifications

### Output(s):

Humidity: 4 to 20 mA DC = 0% to 100% RH.  
Temperature: 4 to 20 mA DC over specified range (optional)

**Humidity Range:** 0 – 100% RH

### Sensing Element:

Humidity: Thin film capacitive element.  
Temperature: 1000 ohm platinum RTD, 0.00385 TCR

**Temperature Effect:**  $\pm 0.03\%$  RH/ $^{\circ}\text{C}$   $\pm 1\%$  from  $10^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

### Operating Temperature:

Transmitter:

- 40 to 176°F (-40 to 80°C), non-condensing.
- 4 to 176°F (-20 to 80°C), non-condensing, model AH73.

Sensor:

- 40 to 302°F (-40 to 150°C).

### Storage Temperature:

-58 to 185°F (-50 to 85°C), non-condensing.

### Supply voltage:

9.5 to 28 VDC for intrinsically safe (IS) models.  
16.5 to 28 VDC for explosionproof (XP) models.

**Voltage effect:**  $\pm 0.001\%$  of span/volt from 9.5 to 28 VDC.

**Loop resistance:** The maximum allowable resistance of the signal-carrying loop, including extension wires and load resistors, is given by this formula:

IS:  $R_{\text{loopmax}} = (V_{\text{supply}} - 9.5) / 0.02 \text{ AMPS}$ . For example, if supply voltage is 24 VDC, the loop resistance must be less than 725  $\Omega$ .

XP:  $R_{\text{loopmax}} = (V_{\text{supply}} - 16.5) / 0.02 \text{ AMPS}$ . For example, if supply voltage is 24 VDC, the loop resistance must be less than 375  $\Omega$ .

*Specifications subject to change*

**Accuracy:** Includes linearity, hysteresis, repeatability, and voltage effects.  
 Humidity:  $\pm 2.5\%$  from 10% to 80% RH @ 25°C,  $\pm 3.5\%$  from 80% to 90% RH @ 25°C.  
 Temperature:  $\pm 0.5^\circ\text{F}$  ( $0.27^\circ\text{C}$ ) @ 77°F (25°C) or  $\pm 0.75\%$  of span, whichever is greater.

**Adjustments:** Zero and Span field adjustments, non-interacting.

**Time Constant:** 50 seconds in slow moving air.

**Connections:** Screw terminals (22-14 AWG wire).

**Weight:**

AH71\_ 2.84 lbs (1.29 kg).

AH72\_, AH73\_ 4.46 lbs (2.02 kg).

**Min. output current:** 3.8 mA.

**Max. output current:** 22 mA.

**Filter:** 60 micron stainless-steel sintered filter  
 (replacement P/N : AC103512)

**Factory Mutual Approvals:**

Explosionproof with intrinsically safe sensor:

Suitable for the following hazardous area locations:

Class I, Division 1, 2, Groups B, C, D

Class II, Division 1, 2, Groups E, F, G

Class III, Division 1, 2

Intrinsically safe installation:

Suitable for the following hazardous area locations:

Class I, Division 1, 2, Groups A, B, C, D

Class II, Division 1, 2, Groups E, F, G

Class III, Division 1, 2

Class I, Zone 0, AEx ia IIC T4

Non-Incendive:

Suitable for the following hazardous area locations:

Class I, Division 2, Groups A, B, C, D

Class II, Division 2, Groups F, G

Class III, Division 2

**Transmitter entity parameters:**

$V_{max} = 28$  volts;  $I_{max} = 100$  mA;  $C_i = 0.037$   $\mu\text{F}$  and  $L_i = 0$  mH.

**Transmitter ranges:**

Code	Transmitter range
NT	No temperature transmitter
EN	-20°F to 140°F
S	0°F to 100°F
A	20°F to 120°F
BI	30°F to 130°F
KK	30°F to 180°F
N	32°F to 122°F
H	40°F to 90°F

**Accessories:**

Sintered Filter Replacement	Part Number: AC103512
Slotted Filter Replacement	Part Number: AC103513
Pipe Mounting Kit for AH72/AH73	Part Number: AC102765
Wall Mounting Kit for AH71	Part Number: AC103168
Duct Mounting Kit for AH71	Part Number: AC103253

**Specification and order options**

AH73	<b>Model number</b> AH71 Industrial grade humidity transmitter with optional temperature transmitter, CH106 connection head, display NA AH72 Industrial grade humidity transmitter with optional temperature transmitter, connection head, display NA AH73 Industrial grade humidity transmitter with optional temperature transmitter, connection head, display available		
1	<b>Probe diameter</b> 1 = 0.375"		
P3	<b>Pipe Thread Code</b>	<b>Process</b>	<b>Conduit</b>
	P3	1/2 - 14NPT	1/2 - 14NPT
	P4	1/2 - 14NPT	3/4 - 14NPT
	P5	G1/2A	1/2 - 14NPT
	P6	G1/2A	3/4 - 14NPT
L120	<b>Probe length</b> L60 = 6" L120 = 12"		
T1	<b>Filter type</b> T1 = Sintered stainless steel T2 = Slotted stainless steel		
HT490	<b>Transmitter model number</b> HT480 = Explosionproof with intrinsically safe sensor (transmitter code NT only) HT490 = Intrinsically safe		
F	<b>Display</b> C = Display, metric units (AH73_series only) F = Display, English units (AH73_series only) N = No display (AH71_ and AH72_ series only)		
1	<b>Signal output</b> 1 = 4 to 20mA		
N25	<b>Calibration accuracy</b> (humidity transmitter) N25 $\pm 2.5\%$ from 10% to 80% (25°C) with NIST certificate S25: $\pm 2.5\%$ from 10% to 80% (25°C)		
EN	<b>Temperature transmitter range from table</b>		
AH731P3L120T1HT490F1N25EN = Sample part number			

HVAC SENSORS

Specify and order products at:  
[www.minco.com/sensors\\_config](http://www.minco.com/sensors_config)

Specifications subject to change

Page Rev. 04/2011



# Intrinsically Safe Humidity Assembly



## Overview

Models AH74 and AH75 are 2-wire temperature compensated humidity transmitters that are FM and CFM approved as intrinsically safe for use in hazardous locations. Both models are available with an optional temperature transmitter output. AH75 incorporates a digital display for remote indication of relative humidity and temperature.

The transmitters utilize a thin film capacitive humidity sensor which provides outstanding sensitivity and chemical robustness. The transmitter converts the humidity sensor's signal into a 4 to 20 mA DC current, which changes proportionally from 4 mA at 0% RH to 20 mA at 100% RH. The optional temperature loop produces a second 4 to 20 mA DC output where the current changes from 4 mA at the lowest temperature of the range, to 20 mA at the top of the temperature range. The leads that supply power also carry the current signal.

- Accuracy of  $\pm 2.5\%$  RH
- Temperature compensated
- Temperature output option
- Two-point field calibration
- NIST traceable calibrations

## Applications

Building automation systems (HVAC), hospitals, food storage, warehouses, clean rooms, pharmaceutical, drying equipment, and emissions monitoring.

## Specifications

### Output(s):

Humidity: 4 to 20 mA DC = 0% to 100% RH.

Temperature: 4 to 20 mA DC over specified range (optional).

**Humidity Range:** 0 – 100% RH

### Sensing Element:

Humidity: Thin film capacitive element.

Temperature: 1000 ohm platinum RTD.

**Temperature Effect:**  $\pm 0.03\%$  RH/ $^{\circ}\text{C}$   $\pm 1\%$  from  $10^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

### Operating Temperature:

Transmitter:

-40 to 176 $^{\circ}\text{F}$  (-40 to 80 $^{\circ}\text{C}$ ), non-condensing.

-4 to 176 $^{\circ}\text{F}$  (-20 to 80 $^{\circ}\text{C}$ ), non-condensing, model AH75.

Sensor:

-40 to 176 $^{\circ}\text{F}$  (-40 to 80 $^{\circ}\text{C}$ ),

### Storage Temperature:

-58 to 185 $^{\circ}\text{F}$  (-50 to 85 $^{\circ}\text{C}$ ), non-condensing.

**Supply voltage:** 9.5 to 28 VDC .

**Voltage effect:**  $\pm 0.001\%$  of span/volt from 9.5 to 28 VDC.

**Loop resistance:** The maximum allowable resistance of the signal-carrying loop, including extension wires and load resistors, is given by this formula:  $R_{\text{loopmax}} = (V_{\text{supply}} - 9.5)/0.02 \text{ AMPS}$ .

**Accuracy:** Includes linearity, hysteresis, repeatability, and voltage effects.

Humidity:  $\pm 2.5\%$  from 10% to 80% RH @ 25 $^{\circ}\text{C}$ ,  $\pm 3.5\%$  from 80% to 90% RH @ 25 $^{\circ}\text{C}$ .

Temperature:  $\pm 0.5^{\circ}\text{F}$ (0.27 $^{\circ}\text{C}$ ) @ 77 $^{\circ}\text{F}$  (25 $^{\circ}\text{C}$ ) or  $\pm 0.75\%$  of span, whichever is greater.

**Adjustments:** Zero and Span field adjustments, non-interacting.

**Time Constant:** 50 seconds in slow moving air.

**Connections:** Screw terminals (22-14 AWG wire).

### Weight:

AH74 0.54 lbs (245 g).

AH75 0.61 lbs (276 g).

**Min. output current:** 3.8 mA.

**Max. output current:** 22 mA.

**Filter:** 60 micron stainless-steel sintered filter (replacement P/N : AC103512)

### Factory Mutual Approvals:

Intrinsically safe:

Suitable for the following hazardous area locations:

Class I, Division 1, Groups A, B, C, D

Class I, Zone 0, AEx ia IIC T4

Non-Incendive:

Suitable for the following hazardous area locations:

Class I, Division 2, Groups A, B, C, D

### Transmitter entity parameters:

$V_{\text{max}} = 28 \text{ volts}$ ;  $I_{\text{max}} = 100 \text{ mA}$ ;  $C_i = 0.037 \mu\text{F}$  and  $L_i = 0 \text{ mH}$ .

*Specifications subject to change*

**Transmitter ranges:**


Code	Transmitter range
NT	No temperature transmitter
EN	-20°F to 140°F
S	0°F to 100°F
A	20°F to 120°F
BI	30°F to 130°F
KK	30°F to 180°F
N	32°F to 122°F
H	40°F to 90°F

**Specification and order options**


AH75	<p><b>Model Number:</b>                      AH74 - Humidity Transmitter with Optional Temperature Transmitter, No Display                      AH75 - Humidity Transmitter with Optional Temperature Transmitter, with Display</p>
1	<p><b>Probe Diameter:</b> 1 = 0.375"</p>
C1	<p><b>Probe Location / Cable Bushings Option:</b>                      Please refer to dimensional drawings for probe Location.</p> <p>C1 = Probe Location A (Rear) / Single Cable Gland                      C2 = Probe Location A (Rear) / Dual Cable Glands                      C3 = Probe Location A (Rear) / Single Conduit Fitting, 1/2" NPT                      C4 = Probe Location A (Rear) / Dual Conduit Fittings, 1/2" NPT</p> <p>C5 = Probe Location B (Bottom) / Single Cable Gland                      C6 = Probe Location B (Bottom) / Dual Cable Glands                      C7 = Probe Location B (Bottom) / Single Conduit Fitting, 1/2" NPT                      C8 = Probe Location B (Bottom) / Dual Conduit Fittings, 1/2" NPT</p> <p><i>Note: If a temperature loop is desired, dual cable glands or dual conduit fittings must be selected unless special cable is used during installation. Please refer to National Electrical Code ANSI/NFPA 70 for installation in accordance with US requirements, or Canadian Electrical Code, C22.1 for installation in accordance with Canadian requirements.</i></p>
L40	<p><b>Probe Length:</b> L40 = 4"</p>
T1	<p><b>Filter Type:</b>                      T1 = Sintered Stainless Steel                      T2 = Slotted Stainless Steel</p>
HT490	<p><b>Transmitter Model Number:</b>                      HT490 = Intrinsically Safe Transmitter</p>
C	<p><b>Display:</b>                      C = Display, Metric Units (AH75_ Series Only)                      F = Display, English Units (AH75_ Series Only)                      N = No Display</p>
1	<p><b>Signal Output:</b> 1 = 4-20mA</p>
N25	<p><b>Calibration Accuracy:</b>                      N25 = ±2.5% from 10% to 80% (25°C) with NIST Certificate                      S25 = ±2.5% from 10% to 80% (25°C)</p>
S	<p>Temperature Transmitter Range from table</p>
<p>AH751C1L40T1HT490C1N25S = Sample part number</p>	

**Dimensions:**

**Probe Location A**

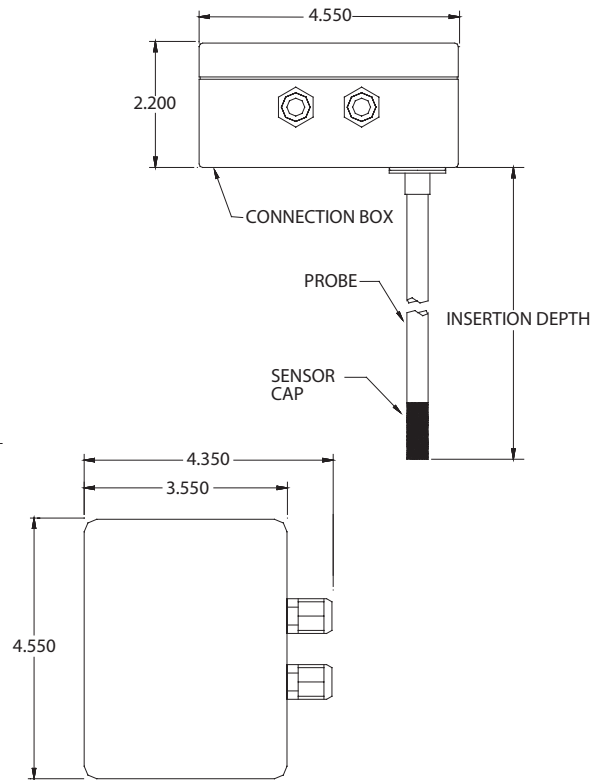

**Probe Location B**

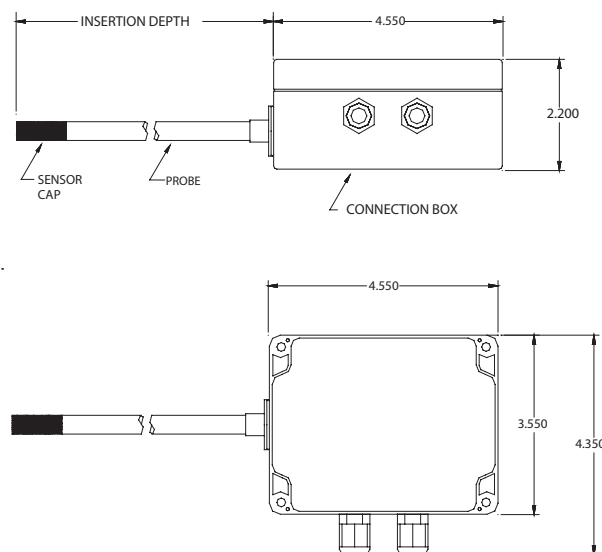

**Specify and order products at:**  
[www.minco.com/sensors\\_config](http://www.minco.com/sensors_config)

*Specifications subject to change*